


## Flame Retardant Overall Screened Instrumentation Cables (Multipair)

RE-2X(St)Y

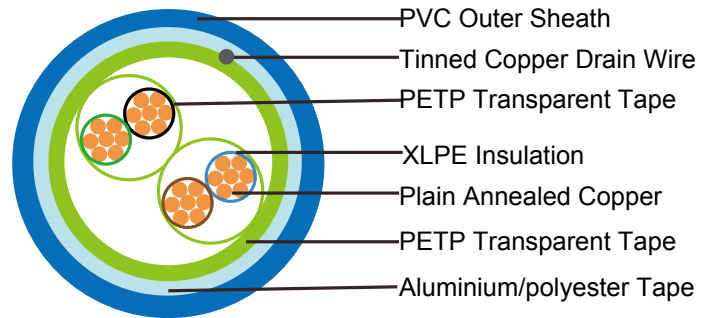

### APPLICATION

The unarmoured PVC versions (Part 1 Type 1) are generally use for indoor installation and suitable for wet and damp areas. Generally used within industrial process manufacturing plants for communication, data and voice transmission signals and services.

### STANDARDS

Basic design adapted to BS 5308 Part 1 Type 1

### FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)**	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)**	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4

Note: Asterisk \*\* denotes that the standard compliance is optional, depending on the oxygen index of the PVC compound and the cable design.

### VOLTAGE RATING

300/500V

### CABLE CONSTRUCTION

**Conductor:** Annealed or tinned copper, sizes: 0.5mm<sup>2</sup> and 0.75mm<sup>2</sup> multistranded(Class 5), 0.5 mm<sup>2</sup>, 1.0 mm<sup>2</sup> solid(Class 1), 1.5mm<sup>2</sup> or 2.5mm<sup>2</sup>, multistranded(Class 2) to BS6360

**Insulation:** XLPE (Cross Linked Polyethylene), or PE (optional)

**Pairs:** Two insulated conductors uniformly twisted together with a lay not exceeding 100mm

**Binder tape:** PETP transparent tape

**Overall Screen:** Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm<sup>2</sup>



**Outer Sheath:** Thermoplastic PVC compound. UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

### COLOUR CODE

**Insulation Colour:** See technical information

**Outer sheath:** Black or blue

### PHYSICAL AND THERMAL PROPERTIES

**Maximum Operating temperature:** -20°C - + 90°C( fixed installation)  
0°C - +50°C(during operation)

**Minimum bending radius:** 5 x Overall Diameter

### ELECTRICAL PROPERTIES

Conductor Area Size	mm <sup>2</sup>	0.5	0.5	0.75	1.0	1.5	
Conductor Stranding	No. x mm	1 x 0.8	16 x 0.2	24 x 0.2	1 x 1.13	7 x 0.53	
Conductor resistance max	ohm/km	36.8	39.7	26.5	18.2	12.3	
Insulation resistance min	Gohm/km	5	5	5	5	5	
Capacitance unbalance at 1 kHz(pair to pair screen)	pF/250m	250					
Max. Mutual Capacitance @ 1 kHz for Non OS or OS cables (except one-pair and two-pairs)	pF/m	115	115	115	115	115	
Max. Mutual Capacitance @ 1 kHz IS/OS cables (include 1 pair and 2 pair)	pF/m	75	75	75	75	75	
Max. L/R Ratio for adjacent cores(Inductance/Resistance)	µH/ohm	25	25	25	25	40	
Test voltage	Core to core	V	1000	1000	1000	1000	1000
	Core to screen	V	1000	1000	1000	1000	1000

## CONSTRUCTION PARAMETERS

Conductor			RE-2X(St)Y			
Number of Pairs	No./ Nominal Diameter of Strands	Nominal Conductor Cross-Section Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Nominal Overall Diameter	Approx. Weight
	no./mm	mm <sup>2</sup>	mm	mm	mm	kg/km
1	1/0.80	0.5	0.5	0.8	5.5	35
2	1/0.80	0.5	0.5	0.8	6.8	55
5	1/0.80	0.5	0.5	1.1	10.9	125
10	1/0.80	0.5	0.5	1.2	14.4	215
15	1/0.80	0.5	0.5	1.2	16.5	300
20	1/0.80	0.5	0.5	1.3	18.8	385
30	1/0.80	0.5	0.5	1.3	22.3	545
50	1/0.80	0.5	0.5	1.5	28.5	875
1	16/0.20	0.5	0.6	0.8	6.2	60
2	16/0.20	0.5	0.6	0.8	7.6	80
5	16/0.20	0.5	0.6	1.1	12.4	210
10	16/0.20	0.5	0.6	1.2	16.5	340
15	16/0.20	0.5	0.6	1.3	19.2	440
20	16/0.20	0.5	0.6	1.3	21.7	570
30	16/0.20	0.5	0.6	1.5	26.4	780
50	16/0.20	0.5	0.6	1.7	33.4	1130
1	24/0.2	0.75	0.6	0.8	6.7	75
2	24/0.2	0.75	0.6	0.9	8.4	100
5	24/0.2	0.75	0.6	1.2	13.8	250
10	24/0.2	0.75	0.6	1.3	18.4	450
15	24/0.2	0.75	0.6	1.5	21.1	600
20	24/0.2	0.75	0.6	1.5	24.4	920
30	24/0.2	0.75	0.6	1.7	29.5	980
50	24/0.2	0.75	0.6	2	37.6	1690
1	1/1.13	1	0.6	0.8	6.6	85
2	1/1.13	1	0.6	0.8	8	115
5	1/1.13	1	0.6	1.2	13.5	290
10	1/1.13	1	0.6	1.2	17.7	500
15	1/1.13	1	0.6	1.3	20.6	670



# Caledonian

## Flame Retardant Instrumentation Cables

www.caledonian-cables.co.uk    www.addison-cables.com



Number of Pairs	Conductor		RE-2X(St)Y			
	No./ Nominal Diameter of Strands	Nominal Conductor Cross-Section Area mm <sup>2</sup>	Nominal Insulation Thickness mm	Nominal Sheath Thickness mm	Nominal Overall Diameter mm	Approx. Weight kg/km
	no./mm	mm <sup>2</sup>	mm	mm	mm	kg/km
20	1/1.13	1	0.6	1.5	23.8	950
30	1/1.13	1	0.6	1.5	28.4	1030
50	1/1.13	1	0.6	2	36.6	1750
1	7/0.53	1.5	0.6	0.8	7.5	100
2	7/0.53	1.5	0.6	0.9	9.3	150
5	7/0.53	1.5	0.6	1.2	15.6	360
10	7/0.53	1.5	0.6	1.3	20.9	690
15	7/0.53	1.5	0.6	1.5	24.6	880
20	7/0.53	1.5	0.6	1.5	27.8	1230
30	7/0.53	1.5	0.6	1.7	33.7	1560
50	7/0.53	1.5	0.6	2	43	2400



300/500V

Rated Voltage



BS 5308

Standard



Flame Retardancy\*\*  
NF C32-070-2.1(C2)  
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation\*\*  
NF C32-070-2.2(C1)  
IEC60332-3-24/EN50266-2-4