



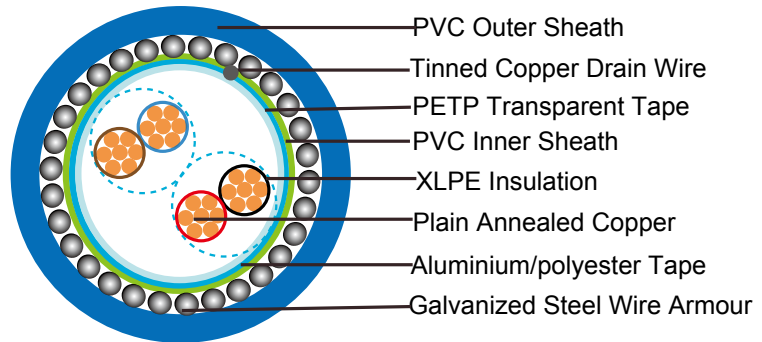

Flame Retardant Overall Screened, Armoured Instrumentation Cables (Multipair)

RE-2X(St)YSWAY

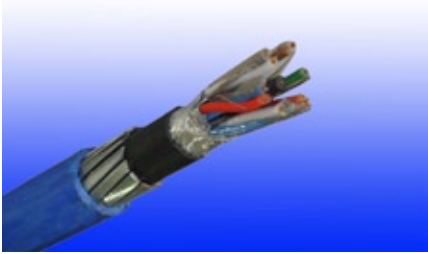

APPLICATION

The armoured PVC versions (Part 1 Type 2) are generally used when the risk of mechanical damage is increased. The galvanized steel wire armour provides excellent protection. Generally used within industrial process manufacturing plants for communication, data and voice transmission signals and services.

STANDARDS

Basic design adapted to BS 5308 Part 1 Type 2

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)**	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)**	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4

Note: Asterisk ** denotes that the standard compliance is optional, depending on the oxygen index of the PVC compound and the cable design.

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

Conductor: Annealed or tinned copper, sizes: 0.5mm² and 0.75mm² multistranded(Class 5), 0.5 mm², 1.0 mm² solid(Class 1), 1.5mm² or 2.5mm², multistranded(Class 2) to BS6360

Insulation: XLPE (Cross Linked Polyethylene), or PE (optional)

Pairs: Two insulated conductors uniformly twisted together with a lay not exceeding 100mm

Binder tape: PETP transparent tape

Overall Screen: Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm²

Inner Sheath: PVC compound

Amouring: Galvanized steel wire armour

Outer Sheath: Thermoplastic PVC compound. UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

COLOUR CODE

Insulation Colour: See technical information

Outer sheath: Black or blue

PHYSICAL AND THERMAL PROPERTIES

Maximum Operating temperature: -20°C - + 90°C(fixed installation)
0°C -+50°C(during operation)

Minimum bending radius: 6 x Overall Diameter

ELECTRICAL PROPERTIES

Conductor Area Size	mm ²	0.5	0.5	0.75	1.0	1.5	
Conductor Stranding	No. x mm	1 x 0.8	16 x 0.2	24 x 0.2	1 x 1.13	7 x 0.53	
Conductor resistance max	ohm/km	36.8	39.7	26.5	18.2	12.3	
Insulation resistance min	Gohm/km	5	5	5	5	5	
Capacitance unbalance at 1 kHz(pair to pair screen)	pF/250m	250					
Max. Mutual Capacitance @ 1 kHz for Non OS or OS cables (except one-pair and two-pairs)	pF/m	115	115	115	115	120	
Max. Mutual Capacitance @ 1 kHz IS/OS cables (include 1 pair and 2 pair)	pF/m	75	75	75	75	85	
Max. L/R Ratio for adjacent cores(Inductance/Resistance)	µH/ohm	25	25	25	25	40	
Test voltage	Core to core	V	1000	1000	1000	1000	1000
	Core to screen	V	1000	1000	1000	1000	1000
Rated voltage max	V	300/500	300/500	300/500	300/500	300/500	



CONSTRUCTION PARAMETERS

Number of Pairs	No./Nominal Diameter of Strands	Nominal Conductor Cross-Section Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Nominal Overall Diameter	Approx. Weight	Nominal Thickness of Sheath	Nominal Dia. of Cable	Approx. Weight
	no./mm	mm ²	mm	mm	mm		kg/km	mm	mm
1	1/0.80	0.5	0.5	0.8	5.5	0.9	1.3	9.9	200
2	1/0.80	0.5	0.5	0.8	6.8	0.9	1.3	11.2	260
5	1/0.80	0.5	0.5	1.1	10.9	0.9	1.4	15.5	460
10	1/0.80	0.5	0.5	1.2	14.4	1.25	1.6	20.1	790
15	1/0.80	0.5	0.5	1.2	16.5	1.25	1.6	22.2	1100
20	1/0.80	0.5	0.5	1.3	18.8	1.6	1.7	25.4	1280
30	1/0.80	0.5	0.5	1.3	22.3	1.6	1.8	29.1	1520
50	1/0.80	0.5	0.5	1.5	28.5	1.6	2	35.7	2100
1	16/0.2	0.5	0.6	0.8	6.2	0.9	1.3	10.6	250
2	16/0.2	0.5	0.6	0.8	7.6	0.9	1.3	12	300
5	16/0.2	0.5	0.6	1.1	12.4	0.9	1.5	17.2	560
10	16/0.2	0.5	0.6	1.2	16.5	1.25	1.6	22.2	970
15	16/0.2	0.5	0.6	1.3	19.2	1.6	1.7	25.8	1240
20	16/0.2	0.5	0.6	1.3	21.7	1.6	1.8	28.5	1640
30	16/0.2	0.5	0.6	1.5	26.4	1.6	1.9	33.4	1770
50	16/0.2	0.5	0.6	1.7	33.4	2	2.1	41.6	2770
1	24/0.2	0.75	0.6	0.8	6.7	0.9	1.4	10.9	280
2	24/0.2	0.75	0.6	0.9	8.4	0.9	1.4	12.8	330
5	24/0.2	0.75	0.6	1.2	13.8	1.25	1.6	19.3	750
10	24/0.2	0.75	0.6	1.3	18.4	1.6	1.8	24.3	1260
15	24/0.2	0.75	0.6	1.3	21.1	1.6	1.9	27	1480
20	24/0.2	0.75	0.6	1.5	24.4	1.6	2	31.4	1890
30	24/0.2	0.75	0.6	1.7	29.5	2	2.1	37	2440
50	24/0.2	0.75	0.6	2	37.6	2.5	2.4	47.3	3210
1	1/1.13	1	0.6	0.8	6.6	0.9	1.3	11	290
2	1/1.13	1	0.6	0.8	8	0.9	1.4	12.6	345
5	1/1.13	1	0.6	1.2	13.5	1.25	1.5	19	790
10	1/1.13	1	0.6	1.2	17.7	1.25	1.7	23.6	1310
15	1/1.13	1	0.6	1.3	20.6	1.6	1.8	27.4	1740
20	1/1.13	1	0.6	1.5	23.8	1.6	1.8	30.6	2040

Number of Pairs	No./Nominal Diameter of Strands	Nominal Conductor Cross-Section Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Nominal Overall Diameter	Approx. Weight	Nominal Thickness of Sheath	Nominal Dia. of Cable	Approx. Weight
	no./mm	mm ²	mm	mm	mm	kg/km	mm	mm	kg/km
30	1/1.13	1	0.6	1.5	28.4	1.6	2	35.6	2180
50	1/1.13	1	0.6	2	36.6	2	2.2	45	3500
1	7/0.53	1.5	0.6	0.8	7.5	0.9	1.4	11.9	320
2	7/0.53	1.5	0.6	0.9	9.3	0.9	1.5	14.1	420
5	7/0.53	1.5	0.6	1.2	15.6	1.25	1.6	21.6	940
10	7/0.53	1.5	0.6	1.3	20.9	1.6	1.8	27.4	1500
15	7/0.53	1.5	0.6	1.5	24.6	1.6	1.9	31.2	1970
20	7/0.53	1.5	0.6	1.5	27.8	1.6	2	35.8	2400
30	7/0.53	1.5	0.6	1.7	33.7	2	2.2	42.3	3170
50	7/0.53	1.5	0.6	2	43	2.5	2.5	53.2	5020



Rated Voltage



Standard



Flame Retardancy**
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation**
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4