


Flame Retardant RG6 A/U Coaxial Cables

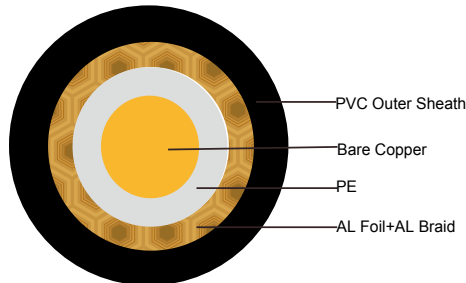

APPLICATION

The cables are designed for CCTV, security, smoke detection and evacuation monitoring applications, where continued functionality is required during a fire situation. Due to the zero halogen low smoke construction, this cable is ideal for use in public, commercial and industrial environments.

STANDARDS

Basic design adapted to MIL-C-17

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)**	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)**	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4

Note: Asterisk ** denotes that the standard compliance is optional, depending on the oxygen index of the PVC compound and the cable design.

CABLE CONSTRUCTION

Conductors: Bare copper copper wire, solid according to IEC(EN) 60228 class 1.

Insulation: Foamed PE compound.

Overall Screen: Aluminium foil(100%)+Aluminium braid (70%)

Outer Sheath: Thermoplastic PVC compound. UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

PHYSICAL AND THERMAL PROPERTIES

Temperature Range During Operation (Fixed State): -30°C - +70°C



Temperature Range During Installation (Mobile State): -5°C - +60°C

Minimum Bending Radius: 8 X Overall Diameter

ELECTRICAL PROPERTIES

IMPEDANCE	75±5Ω
CAPACITANCE	54 NF/KM
Velocity ratio(%)	82
Insulation resistance	>5000 Mohm.Km
Shield coverage	AL FOIL(100%)+AL 70%
DC resistance	
Inner conductor	23.1 Ω/km
Outer conductor	31 Ω/km

ATTENUATION

Frequency(MHz)	Attenuation (dB/100 m)	Attenuation (dB/100ft)
50	5.0	1.5
100	6.4	1.96
200	9.2	2.8
500	14.5	4.4
600	15.9	4.9
800	17.7	5.4
1000	21.9	6.7
1350	24.9	7.6
1750	29.0	8.8
2050	33.1	10.1
2400	36.4	11.1

RETURN LOSS

Frequency(MHz)	Return Loss (dB)
30-300	>28dB
300-600	>24dB
600-900	>22dB

CONSTRUCTION PARAMETERS

Cable Code	Conductor Diameter	Nominal Insulation Diameter	Nominal Screen No. x Diameter	Nominal Overall Diameter	Approx. Weight
	mm	mm	No. x mm	mm	kg/km
FGD RG6 A/U	1.02	4.57 ± 0.20	96 x 0.12	7.00	81.6



Rated Voltage



Standard



Flame Retardancy**
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation**
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4

