


Flame Retardant Individual and Overall Screened, Armoured Instrumentation Cables (Multipair)

RE-2X(St)HSWAH PiMF

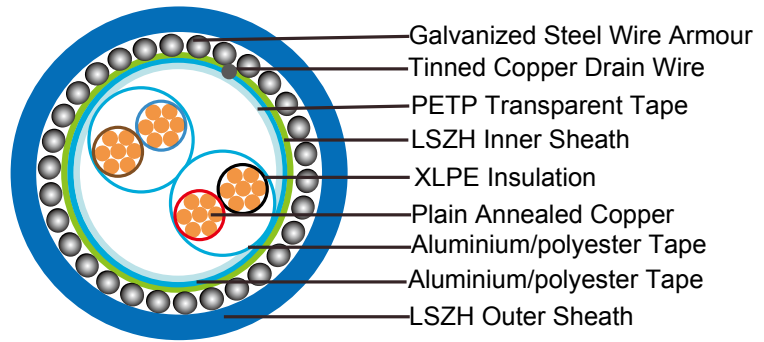

APPLICATION

The armoured LSZH versions (Part 1 Type 2) cables are generally used when the risk of mechanical damage is increased. The galvanized steel wire armour provides excellent protection. Generally used within industrial process manufacturing plants for communication, data and voice transmission signals and services, Also used for the interconnection of electrical equipment and instruments, the LSZH sheath can reduce toxic smoke and fume emission.

STANDARDS

Basic design adapted to BS 5308 Part 1 Type 2

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.



VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

Conductor: Annealed or tinned copper, sizes: 0.5mm² and 0.75mm² multistranded(Class 5), 0.5 mm², 1.0 mm² solid(Class 1), 1.5mm² or 2.5mm², multistranded(Class 2) to BS6360

Insulation: XLPE (Cross Linked Polyethylene), or PE (optional)

Pairs: Two insulated conductors uniformly twisted together with a lay not exceeding 100mm

Individual Screen: Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm²

Binder tape: PETP transparent tape

Overall Screen: Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm²

Inner Sheath: LSOH(Low Smoke Zero Halogen) sheath

Armouring: Galvanized steel wire armour

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.). UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option.

COLOUR CODE

Insulation Colour: See technical information

Outer Sheath: Black or blue

PHYSICAL AND THERMAL PROPERTIES

Maximum Operating temperature: -20°C - + 90°C(fixed installation)
0°C - +50°C(during operation)

Minimum bending radius: 6 x Overall Diameter

ELECTRICAL PROPERTIES

Conductor Area Size	mm ²	0.5	0.5	0.75	1.0	1.5
Conductor Stranding	No. x mm	1 x 0.8	16 x 0.2	24 x 0.2	1 x 1.13	7 x 0.53
Conductor resistance max	ohm/km	36.8	39.7	26.5	18.2	12.3
Insulation resistance min	Gohm/km	5	5	5	5	5
Capacitance unbalance at 1 kHz(pair to pair screen)	pF/250m	250				
Max. Mutual Capacitance @ 1 kHz for Non OS or OS cables (except one-pair and two-pairs)	pF/m	115	115	115	115	120
Max. Mutual Capacitance @ 1 kHz IS/OS cables (include 1 pair and 2 pair)	pF/m	75	75	75	75	85

Max. L/R Ratio for adjacent cores(Inductance/Resistance)		μH/ohm	25	25	25	25	40
Test voltage	Core to core	V	1000	1000	1000	1000	1000
	Core to screen	V	1000	1000	1000	1000	1000
Rated voltage max		V	300/500	300/500	300/500	300/500	300/500

CONSTRUCTION PARAMETERS

No.of Pairs	No./ Nominal Diameter of Strands	Nominal Conductor Cross-Section Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Diameter Overall Inner Sheath	Nominal Armour Thickness	Nominal Sheath Thickness	Nominal Overall Diameter	Approx. Weight
	no./mm	mm ²	mm	mm	mm	mm	mm	mm	kg/km
2	1/0.80	0.5	0.5	0.9	9.7	0.9	1.4	14.3	380
5	1/0.80	0.5	0.5	1.2	13	1.25	1.5	18.5	640
10	1/0.80	0.5	0.5	1.2	16.9	1.25	1.7	22.8	890
15	1/0.80	0.5	0.5	1.3	19.7	1.6	1.7	26.3	1350
20	1/0.80	0.5	0.5	1.3	22.3	1.6	1.8	29.1	1470
30	1/0.80	0.5	0.5	1.5	27.1	1.6	1.9	34.1	1870
50	1/0.80	0.5	0.5	2	35	2	2.2	43.4	3000
2	16/0.2	0.5	0.6	1.1	11.2	0.9	1.5	16	460
5	16/0.2	0.5	0.6	1.2	14.5	1.25	1.6	20.2	760
10	16/0.2	0.5	0.6	1.3	19.3	1.6	1.8	26.1	1300
15	16/0.2	0.5	0.6	1.5	22.6	1.6	1.8	29.4	1440
20	16/0.2	0.5	0.6	1.5	25.7	1.6	1.9	32.7	1870
30	16/0.2	0.5	0.6	1.7	31	2	2.1	39.2	2400
50	16/0.2	0.5	0.6	2.2	39.9	2.5	2.4	49.7	3930
2	24/0.2	0.75	0.6	1.1	12.1	0.9	1.5	16.9	500
5	24/0.2	0.75	0.6	1.2	15.7	1.25	1.6	21.4	920
10	24/0.2	0.75	0.6	1.3	20.9	1.6	1.7	27.5	1610
15	24/0.2	0.75	0.6	1.5	24.6	1.6	1.9	31.6	1960
20	24/0.2	0.75	0.6	1.5	27.9	1.6	1.9	34.9	2420
30	24/0.2	0.75	0.6	2	34.4	2	2.2	42.8	3180
50	24/0.2	0.75	0.6	2.2	43.5	2.5	2.5	53.5	4506
2	1/1.13	1	0.6	1.1	11.9	0.9	1.5	16.7	515
5	1/1.13	1	0.6	1.2	15.4	1.25	1.6	21.1	950
10	1/1.13	1	0.6	1.3	20.5	1.6	1.8	27.3	1330



Caledonian

Flame Retardant Instrumentation Cables

www.caledonian-cables.co.uk www.addison-cables.com



No. of Pairs	No. / Nominal Diameter of Strands	Nominal Conductor Cross-Section Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Diameter Overall Inner Sheath	Nominal Armour Thickness	Nominal Sheath Thickness	Nominal Overall Diameter	Approx. Weight
	no./mm	mm ²	mm	mm	mm	mm	mm	mm	kg/km
15	1/1.13	1	0.6	1.5	24.1	1.6	1.9	31.1	1680
20	1/1.13	1	0.6	1.7	27.7	2	2	35.7	2540
30	1/1.13	1	0.6	2	33.7	2	2.2	42.1	2900
50	1/1.13	1	0.6	2.2	42.5	2.5	2.5	52.5	4800
2	7/0.53	1.5	0.6	1.2	13.6	1.25	1.6	19.3	730
5	7/0.53	1.5	0.6	1.3	17.7	1.6	1.7	24.3	1180
10	7/0.53	1.5	0.6	1.5	23.9	1.6	1.9	30.9	1820
15	7/0.53	1.5	0.6	1.7	28	2	2	36	2350
20	7/0.53	1.5	0.6	1.7	31.7	2	2.1	39.9	3030
30	7/0.53	1.5	0.6	2	38.6	2	2.5	48.6	4050
50	7/0.53	1.5	0.6	2.2	48.9	2	2.7	59.3	5960



300/500V

Rated Voltage



BS 5308

Standard



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24
EN50266-2-4




Low Toxicity
NES 02-713/NF C 20-454



Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Zero

Halogen Free
IEC60754-1
EN50267-2-1



BS 5308 Part 1 Colour Code

BS 5308 Part 1 Colour Identification

Pair No.	a-wire	b-wire	Pair No.	a-wire	b-wire
1	Black	Blue	26	White	Yellow
2	Black	Green	27	Red	Yellow
3	Blue	Green	28	Orange	Yellow
4	Black	Brown	29	Black	Grey
5	Blue	Brown	30	Blue	Grey
6	Green	Brown	31	Green	Grey
7	Black	White	32	Brown	Grey
8	Blue	White	33	White	Grey
9	Green	White	34	Red	Grey
10	Brown	White	35	Orange	Grey
11	Black	Red	36	Yellow	Grey
12	Blue	Red	37	Black	Violet
13	Green	Red	38	Blue	Violet
14	Brown	Red	39	Green	Violet
15	White	Red	40	Brown	Violet
16	Black	Orange	41	White	Violet
17	Blue	Orange	42	Red	Violet
18	Green	Orange	43	Orange	Violet
19	Brown	Orange	44	Yellow	Violet
20	White	Orange	45	Grey	Violet
21	Red	Orange	46	Black	Turquoise
22	Black	Yellow	47	Blue	Turquoise
23	Blue	Yellow	48	Green	Turquoise
24	Green	Yellow	49	Brown	Turquoise
25	Brown	Yellow	50	White	Turquoise

Single Quad (2 pair) are colour coded in clockwise order of rotation: Black, Blue, Green and Brown
 Individually screened pairs can also be identified by means of a polyester tape over blue and black pairs

For cables in triple configuration please request colour code at time of enquiry
 Instrument Cables BS 5308 Part 2 Colour code



BS 5308 Part 2 Colour Identification

Pair No.	a-wire		b-wire	Pair No.	a-wire		b-wire
1	White		Blue	26	Red	Blue	Blue
2	White		Orange	27	Red	Blue	Orange
3	White		Green	28	Red	Blue	Green
4	White		Brown	29	Red	Blue	Brown
5	White		Grey	30	Red	Blue	Grey
6	Red		Blue	31	Blue	Black	Blue
7	Red		Orange	32	Blue	Black	Orange
8	Red		Green	33	Blue	Black	Green
9	Red		Brown	34	Blue	Black	Brown
10	Red		Grey	35	Blue	Black	Grey
11	Black		Blue	36	Yellow	Blue	Blue
12	Black		Orange	37	Yellow	Blue	Orange
13	Black		Green	38	Yellow	Blue	Green
14	Black		Brown	39	Yellow	Blue	Brown
15	Black		Grey	40	Yellow	Blue	Grey
16	Yellow		Blue	41	White	Orange	Blue
17	Yellow		Orange	42	White	Orange	Orange
18	Yellow		Green	43	White	Orange	Green
19	Yellow		Brown	44	White	Orange	Brown
20	Yellow		Grey	45	White	Orange	Grey
21	White	Blue	Blue	46	Orange	Red	Blue
22	White	Blue	Orange	47	Orange	Red	Orange
23	White	Blue	Green	48	Orange	Red	Green
24	White	Blue	Brown	49	Orange	Red	Brown
25	White	Blue	Grey	50	Orange	Red	Grey

*For bi- coloured cores the first colour is the base colour

Single Quad (2 pair) are colour coded in clockwise order of rotation: Black, Blue, Green and Brown
 Individually screened pairs can also be identified by means of a polyester tape over blue and black pairs

For cables in triple configuration please request colour code at time of enquiry