




Flame Retardant RG11 A/U Coaxial Cables

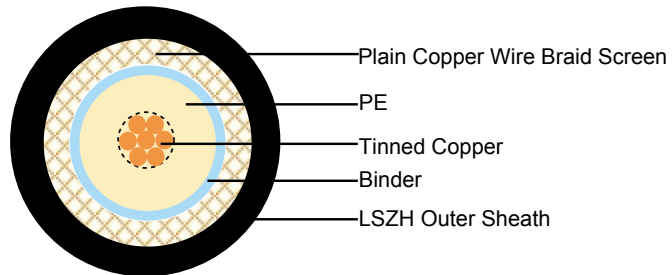

APPLICATION

The cables are designed for CCTV, security, smoke detection and evacuation monitoring applications, where continued functionality is required during a fire situation. Due to the zero halogen low smoke construction, this cable is ideal for use in public, commercial and industrial environments.

STANDARDS

Basic design adapted to MIL-C-17

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.

CABLE CONSTRUCTION

Conductors: Tinned copper wire, stranded according to IEC(EN) 60228 class 2.

Insulation: Low density PE.

Overall Screen: Plain copper wire braid

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655:section 2.6 can be offered.). UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option.

PHYSICAL AND THERMAL PROPERTIES

Temperature Range During Operation (Fixed State): -30°C - +70°C

Temperature Range During Installation (Mobile State): -5°C - +60°C

Minimum Bending Radius: 8 X Overall Diameter

ELECTRICAL PROPERTIES

IMPEDANCE	75±5Ω
CAPACITANCE	67 NF/KM
Velocity ratio(%)	66
Insulation resistance	>2000 Mohm.Km
Shield coverage	97%
DC resistance	
Inner conductor	20.5 Ω/km
Outer conductor	4.5 Ω/km

ATTENUATION

Frequency(MHz)	Attenuation (dB/100 m)	Attenuation (dB/100ft)
50	4.2	1.28
100	6.2	1.89
200	9.3	2.84
400	13.8	4.21
500	15.5	4.73
600	17.1	5.21
860	20.1	6.13
1000	23.4	7.13

RETURN LOSS

Frequency(MHz)	Return Loss (dB)
30-300 MHz	>30dB
300-600 MHz	>27dB
600-900 MHz	>25dB



CONSTRUCTION PARAMETERS

Cable Code	Conductor Diameter	Nominal Insulation Diameter	Nominal Screen No.x Diameter	Nominal Overall Diameter	Approx. Weight
	mm	mm	No. x mm	mm	kg/km
FTX-RG11 A/U	7 x 0.40	7.25 ± 0.18	192 x 0.18	10.3 ± 0.18	150



300/500V

Rated Voltage



MIL-C-17

Standard



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24
EN50266-2-4




Low Toxicity
NES 02-713/NF C 20-454



Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Halogen Free
IEC60754-1
EN50267-2-1