



Fire Resistant Central Loose Tube Fiber Optic Cables

APPLICATION

These cables are characterized by light weight and small diameter, suitable for both aerial and duct installation. They are mainly installed inside buildings, tunnels, subways or closed areas in general, specially designed to guarantee the signal transmission even in case of fire. The cable can also be used for direct burial for armoured version.

STANDARDS

Basic design to Telcordia GR-20 / RUS 7 CFR 1755.900 (REA PE-90) / ICEA S 87-640

FIRE PERFORMANCE

Circuit Integrity	IEC 60331-25; BS 6387 CWZ; DIN VDE 0472-814(FE180); CEI 20-36/2-1; SS229-1; NBN C 30-004 (cat. F3); NF C32-070-2.3(CR1)
System circuit integrity	DIN 4102-12, E30 depending on lay system
Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.

CABLE CONSTRUCTION

Fibers: Singlemode and multimode fibers, with loose tube technology.

Structure: Central loose tube cable contains one tube with 2-24 single or multimode fibers, which are filled with water blocking gel.

Fire barrier: The jelly filled tube with up to 24 fibers is wrapped with a fire blocking mica glass tapes.

Water blocking: The jelly filled tube is waterblocked by using swellable tape and thread.

Reinforcement: Either aramid yarn or fiber glass is wound around the tube to provide physical protection and tensile strength, with added fire protection.

Inner Sheath (optional): The cable can be jacketed with either PE or thermoplastic LSZH inner sheath. PE is the preferred option in outdoor environment for water protection purpose.

Moisture Barrier Tape (optional): An aluminum moisture tape can be incorporated under the sheath for water blocking and shielding purpose.

Armouring(optional):

For direct burial, either galvanized steel wire braid, corrugated steel tape armour or galvanized steel wire armour is applied over an inner polyethylene or LSZH sheath. For steel tape armour, the 0.15mm thick steel tape is coated with a copolymer and applied with an overlap. For steel wire braid or armour, single layer of galvanized steel wire braid or armour is applied.

Ripcord (optional): An optional ripcord can be located under the jacket to facilitate jacket removal.


Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1(Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.)

FIBER COLOUR CODE

Fiber colour code	1	Red	7	Brown
	2	Green	8	Violet
	3	Blue	9	Turquoise
	4	Yellow	10	Black
	5	White	11	Orange
	6	Grey	12	Pink

CONSTRUCTION

UNARMoured TYPE

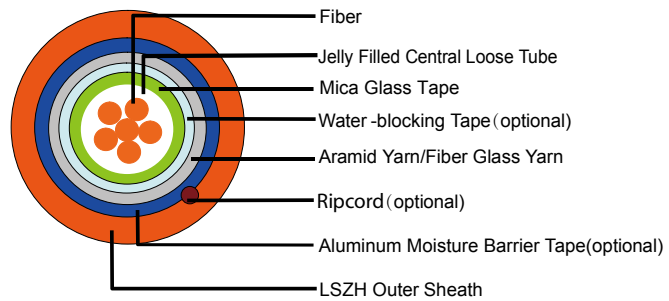


CONSTRUCTION PARAMETERS

Cable Code	Fiber Count	Tube Diameter	Nominal Overall Diameter	Approx. Weight	Tension load	Crush
	(n°)	mm	mm	kg/km	N	N/100mm
CLA-B-C-H-J-FR	02-06	2.7	8.0	70	1000	1500
CLA-B-C-H-J-FR	08-16	3.5	9.0	90	1200	1500
CLA-B-C-H-J-FR	18-24	4.2	10.0	100	1500	1500





STEEL WIRE BRAID

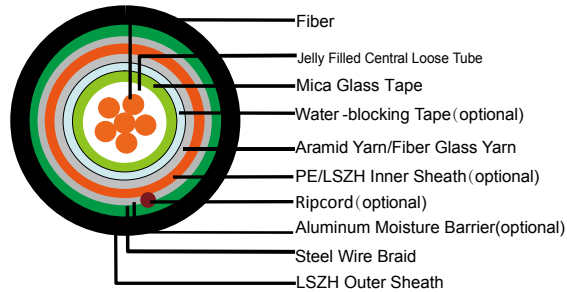

CONSTRUCTION PARAMETERS

Cable Code	Fiber Count	Tube Diameter	Nominal Overall Diameter	Approx. Weight	Tension load	Crush
	(n°)	mm	mm	kg/km	N	N/100mm
CLA-B-C-2Y(SWB)H-J-FR	02-06	2.7	11.5	160	1000	2000
CLA-B-C-2Y(SWB)H-J-FR	08-16	3.5	12.0	180	1200	2000
CLA-B-C-2Y(SWB)H-J-FR	18-24	4.2	13.0	200	1500	2000


CORRUGATED STEEL TAPE ARMOUR

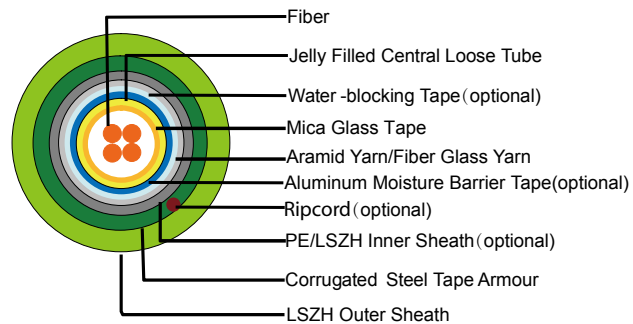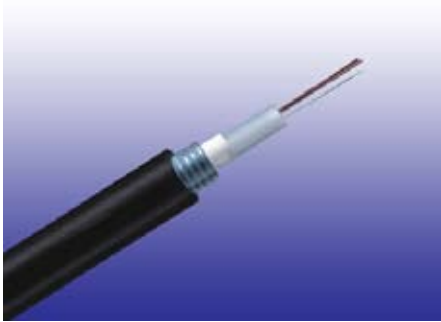

CONSTRUCTION PARAMETERS

Cable Code	Fiber Count	Tube Diameter	Diameter	Approx. Weight	Tension load	Crush
	(n°)	mm	mm	kg/km	N	N/100mm
CLA-B-C-2Y(STA)H-J-FR	02-06	2.7	13.0	200	1000	2500
CLA-B-C-2Y(STA)H-J-FR	08-16	3.5	14.0	220	1200	2500
CLA-B-C-2Y(STA)H-J-FR	18-24	4.2	14.5	250	1500	2500

STEEL WIRE ARMOUR

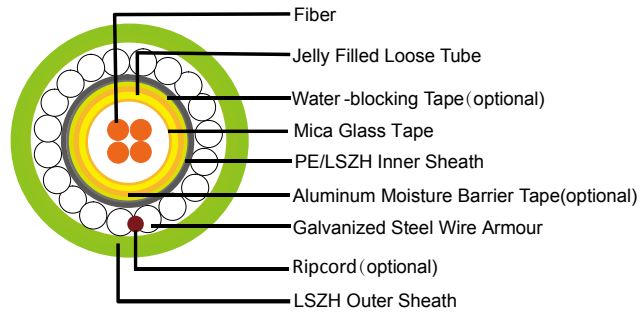

CONSTRUCTION PARAMETERS

Cable Code	Fiber Count	Tube Diameter	Nominal Overall Diameter	Approx. Weight	Tension load	Crush
	(n°)	mm	mm	kg/km	N	N/100mm
CLA-B-C-2Y(SWA)H-J-FR	02-12	2.7	10.5	180	2500	4000
CLA-B-C-2Y(SWA)H-J-FR	16-24	3.5	11.0	210	2500	4000

PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -20°C - +60°C

Temperature range during installation (mobile state): 0°C - +50°C

Minimum Operation Bending Radius: 10 times the outer diameter for unarmoured cables
20 times the outer diameter for armoured cables

Minimum Installation Bending Radius: 20 times the outer diameter

MECHANICAL PROPERTIES

Maximum Compressive Load	4000N for unarmoured cables 5000N for armoured cables
Repeated Impact:	4.4 N.m (J)
Twist (Torsion):	180×10 times, 125×OD
Cyclic Flexing:	25 cycles for armoured cables; 100 cycles for unarmoured cables.
Crush Resistance:	263N/cm (150lb/in)

FIBER COMPLIANCE

Temperature Cycling	IEC60794-1-2-F2
Tensile Strength	IEC60794-1-2-E1A



Caledonian

Fire Resistant Optic Fiber Cables


www.caledonian-tech.net www.caledonian-tech.com



Crush	IEC60794-1-2-E3
Impact	IEC60794-1-2-E4
Repeated Bending	IEC60794-1-2-E6
Torsion	IEC60794-1-2-E7
Kink	IEC60794-1-2-E10
Cable Bend	IEC60794-1-2-E11
Cool Bend	IEC60794-1-2-E11

TYPE CODES


CL A B C D E F G FR

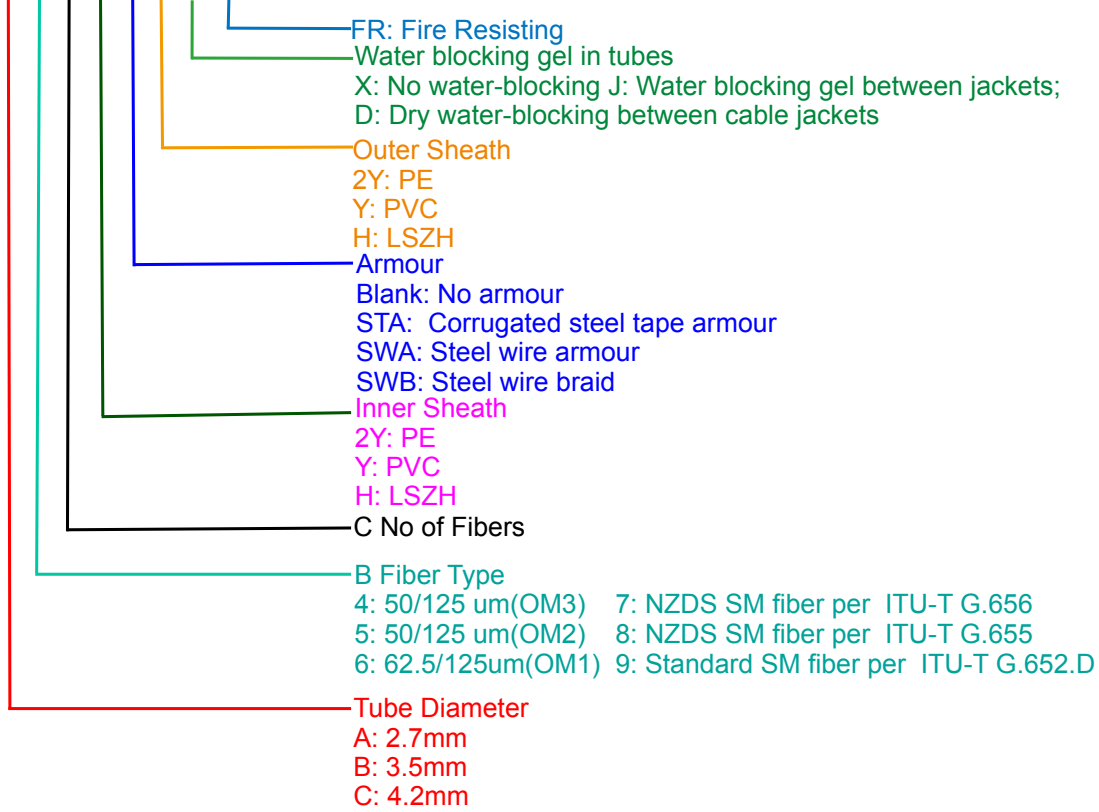

Standard



Standard



Circuit Integrity
IEC 60331/BS 6387
NF C32-070-2.3(CR1)



Reduced Fire Propagation
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4



Flame Retardancy
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1




Low Toxicity
NES 02-713/NF C 20-454




Low Corrosivity
IEC60754-2
EN50267-2-2/3
NF C 32-074



Low Smoke Emission
IEC 61034-1&2
EN 50268-1&2/NF C32-073



Halogen Free
IEC60754-1
EN50267-2-1



Functional Integrity
DIN 4102-12